




# *LPX Series*

*Anti-Legionella Series User Guide*

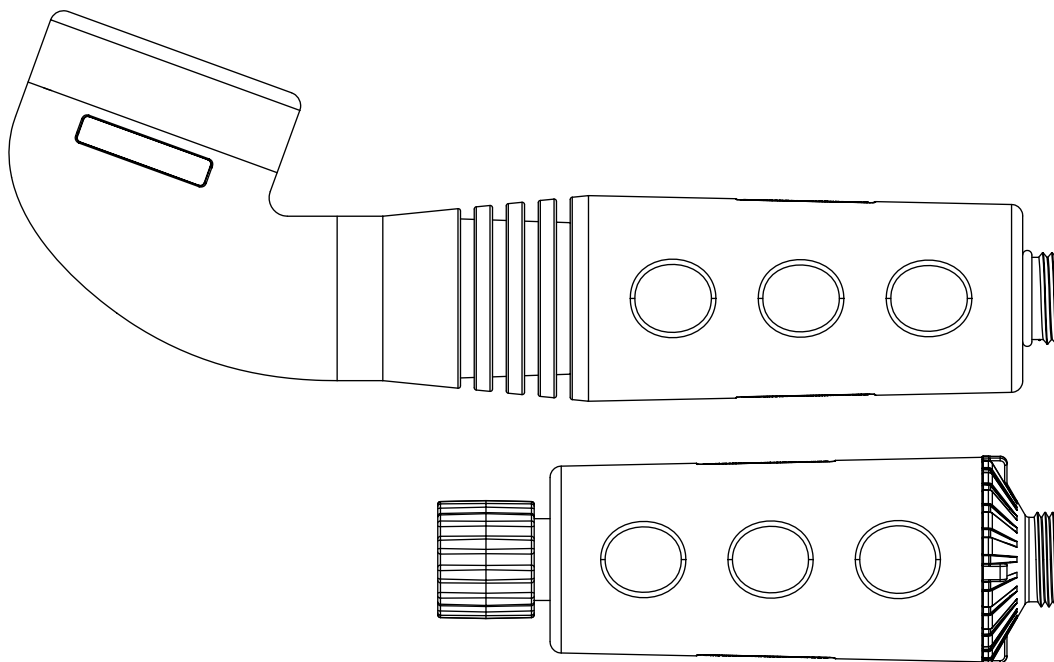

**Puretec®**  
PERFECTING WATER




WATER TREATMENT

## Puretec Anti-Legionella Series

Thank you for purchasing a Puretec Anti-Legionella Filter. Your filter is a proven performer, manufactured from only quality materials and components. These filters are designed for metropolitan supply water. The Puretec Anti Legionella Filter cartridge needs replacing every 5,000 litres to maintain optimum performance.

**NOTE: Due to the ultra-fine filtration of the LPX Series it is recommended to install a 1 micron filtration system prior to the LPX to avoid pre-mature blockage.**

### LPX-SHOWER

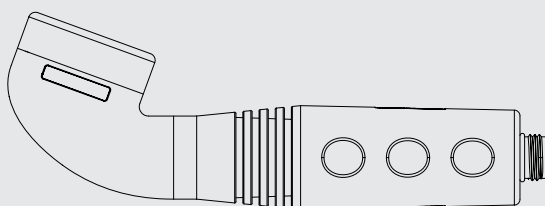




Replacement cartridge code for **LPX-SHOWER** model: Puretec **LPX-SHOWER-R**

### LPX-SHOWER Installation


1. Disconnect the existing shower head from the flexible hose by turning it in an anti-clockwise direction.
2. Remove the shower filter from the packaging and screw it onto the flexible hose in a clockwise direction.

### LPX-SHOWER Cartridge Replacement

1. Unscrew the shower filter housing from the flexible hose by turning it anti-clockwise.
2. Unscrew the filter housing from the shower filter head by turning it anti-clockwise.
3. Unpack from packaging and screw the replacement cartridge clockwise onto the shower head.
4. Reattach the flexible hose to the filter housing in a clockwise direction.



## LPX-INLINE

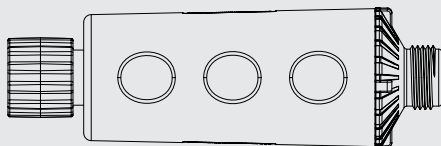




Re-order code for Anti-Legionella Inline Filter: Puretec LPX-INLINE

### LPX-INLINE Installation

1. Disconnect the existing flexible hose from the water mixer
2. Remove the inline filter from the packaging and connect the top (female to female) adaptor to the water mixer.
3. Connect the bottom adaptor (male to male) to the flexible hose. To ensure the flow direction is correct, the female adaptor must be connected to the mixer or incoming water supply.


### LPX-INLINE Cartridge Replacement

1. Disconnect the filter housing from the water mixer and the flexible hose.
2. Unscrew the top and bottom adaptors from the filter housing. Make sure you keep the adaptors.
3. Remove the replacement filter from the packaging, connect the adaptors to the new filter housing. The female adaptor connects to the thinner end of the filter housing.
4. Re-connect the filter to the water mixer and flexible hose.



# Tap Anti-Legionella Filter

## LPX-TAP





Replacement cartridge code for **LPX-TAP** model: Puretec **LPX-TAP-R**

### LPX-TAP Installation

1. Remove the tap filter from the packaging.
2. **MIXER TAP INSTALLATION:** Screw in the tap connector nut onto your existing mixer tap. Ensure the rubber O-ring is in place. **SHOWER HEAD INSTALLATION:** Unscrew the existing shower head from the flexible hose and use one of the adaptors in the package (whichever fits your hose) to connect the filter to the hose.

### LPX-TAP Cartridge Replacement

1. Unscrew the filter cartridge anti-clockwise from the sprayer.
2. Remove from packaging and insert new filter cartridge by screwing into the sprayer in a clockwise direction.



**Installation Note:** A water filter system/tap, like any product, has a limited life and may eventually fail. Also sometimes failure happens early due to unforeseen circumstances. To avoid possible property damage, this product should be regularly examined for leakage and/or deterioration and replaced when necessary. A drain pan, plumbed to an appropriate drain or outfitted with a leak detector, should be used in those applications where any leakage could cause property damage, and/or the water supply should be turned off if no one is home/present.



#### AUSTRALIA

P 1300 140 140

E [sales@puretec.com.au](mailto:sales@puretec.com.au)

W [puretec.com.au](http://puretec.com.au)

#### NEW ZEALAND

P 0800 130 140

E [sales@puretec.co.nz](mailto:sales@puretec.co.nz)

W [puretec.co.nz](http://puretec.co.nz)