




RM SERIES PERFORMANCE DATA

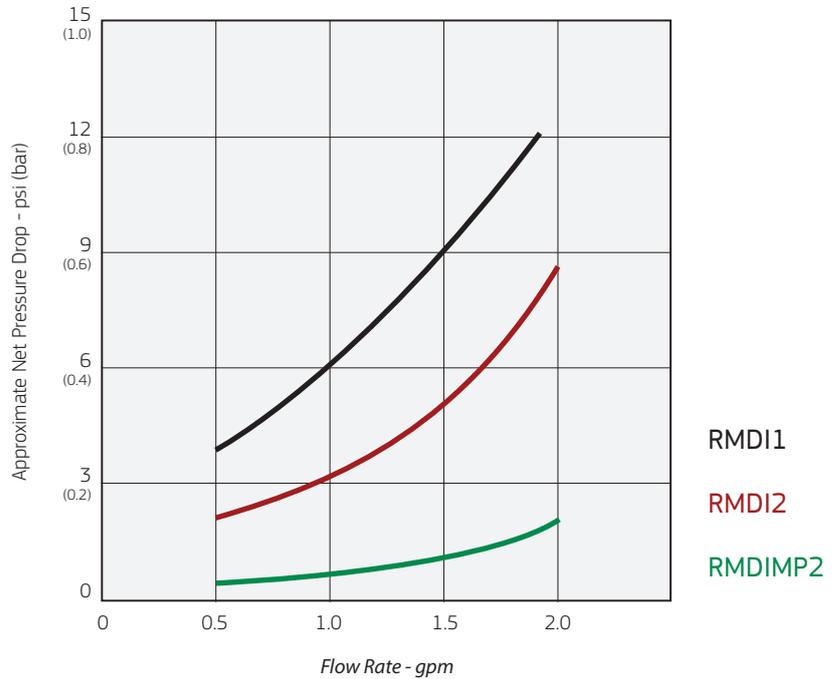

GENERAL INFO

RESIN MEDIA CARTRIDGES

The Puretec RM Series cartridges have been developed in response to the requirements for deionized water in many industrial needs. These high capacity, semi-conductor-grade resin cartridges are ideal for use in pharmaceutical and medical laboratories, cosmetics, and circuit board printing applications.

These cartridges are convenient and cost effective for many applications where low level of total organic carbon (TOC) and total dissolved solids (TDS) are required.

CARTRIDGES SPECIFICATIONS AND PERFORMANCE DATA

FEATURES & BENEFITS

Model	Description	Flow (Lpm)	Size
RMDI1	Demineralising action	8	standard 2.5" x 10"
RMDI2	Demineralising action	15	standard 2.5" x 20"
RMDIMP1	Demineralising action	20	MaxiPlus 4.5" x 10"
RMDIMP2	Demineralising action	40	MaxiPlus 4.5" x 20"

- Designed to deionize water up to 16 megaohms
- Various resin media available
- Flow rates up to 40 litres per minute