

GENERAL INFO

HEAVY DUTY FILTER HOUSINGS

Versatile, heavy duty water filter housing for up to 76 litres/minute. The unique advantage with this versatile range of housings is that they are both compact and durable enough to use anywhere in so many different situations, whether it be at home, work or in industrial processes.

The FP Series are capable of pressures up to 875* kPa at 52°C and accept a broad range of Puretec cartridges to suit your requirements.

FEATURES & BENEFITS

- Compact, durable, economical design
- Quick and easy installation
- Compact and economical, ideal for duplex systems
- Internal and external use to suit different applications
- Ribbed design provides a robust housing for years of trouble free service
- Available in 10" and 20" heights
- Suitable for flow rates up to 76 litres per minute
- UV stabilised



FP20M

20", ¾" connection
Housing



FP10M-2B

10", ½" connection
Housing Kit



FP10Q

10", ¼" connection
Housing

HOUSING SPECIFICATIONS

| Model Numbers | Size inches | Description | Connection | Min/Max Temp | Min/Max Pressure | Min/Max Flow | Dimensions (mm) |
|-----------------|-------------|--|------------|--------------|------------------|--------------|-----------------|
| FP10B | 10" | Filter housing kit with grey bowl <i>Includes spanner wrench and mounting bracket</i> | ¾" (20 mm) | 0 - 52°C | 0 - 875* kPa | 0 - 38 Lpm | 115 x 307 |
| FP10M | 10" | Filter housing with grey bowl <i>(no spanner)</i> | ¾" (20 mm) | 0 - 52°C | 0 - 875* kPa | 0 - 38 Lpm | 115 x 307 |
| FP10M-2 | 10" | Filter housing with grey bowl <i>(no spanner)</i> | ½" (15 mm) | 0 - 52°C | 0 - 875* kPa | 0 - 38 Lpm | 115 x 307 |
| FP10M-2B | 10" | Filter housing kit with grey bowl <i>Includes spanner wrench and mounting bracket</i> | ½" (15 mm) | 0 - 52°C | 0 - 875* kPa | 0 - 38 Lpm | 115 x 307 |
| FP10Q | 10" | Filter housing with white bowl <i>(no spanner)</i> | ¼" (6mm) | 0 - 52°C | 0 - 875* kPa | 0 - 38 Lpm | 115 x 307 |
| FP20B | 20" | Filter housing kit with grey bowl <i>Includes spanner wrench and mounting bracket</i> | ¾" (20 mm) | 0 - 52°C | 0 - 875* kPa | 0 - 76 Lpm | 115 x 599 |
| FP20M | 20" | Filter housing with grey bowl <i>(no spanner)</i> | ¾" (20 mm) | 0 - 52°C | 0 - 875* kPa | 0 - 76 Lpm | 115 x 599 |


10 year warranty applies to FP10B, FP10M, FP20B and FP20M. All other housings carry a 3 year warranty. 10 year warranty is 1 year parts and labour plus 9 years parts only. 3 year warranty is 1 year parts and labour plus 2 years parts only. Pressure + Temperature ratings mean housings must be protected from extremes above and below. This includes freezing, vacuum, overnight pressure creep + water hammer. * Where line pressure exceeds 500 kPa, an approved pressure limiting device must be installed to comply with Australian & New Zealand Plumbing Standards. (Ref. AS/NZS 3500.1:2021, Clause 3.3.4).

MATERIALS OF CONSTRUCTION


- Housing Polypropylene
- Cap Reinforced Polypropylene
- O-Ring Buna-N
- Min/Max Temperature 0 - 52°C (protect from freezing)
- Maximum Pressure 875* kPa for Polypropylene

*Where line pressure exceeds 500 kPa, an approved pressure limiting device must be installed to comply with Australian & New Zealand Plumbing Standards. (Ref. AS/NZS 3500.1:2021, Clause 3.3.4).


PRESSURE / FLOW RATE CHART

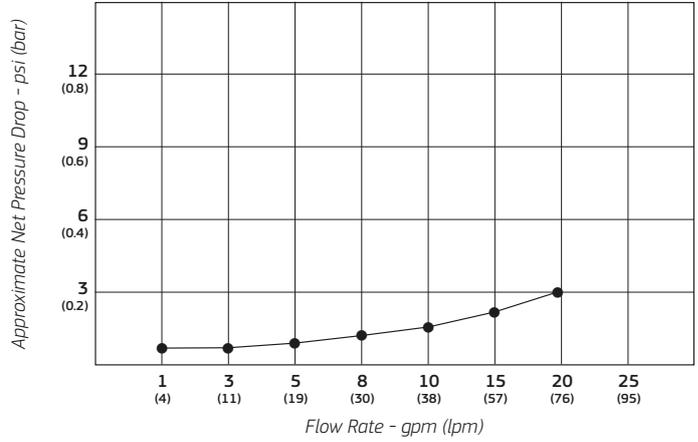

PRODUCT DIMENSIONS Measurements in Millimeters (mm)

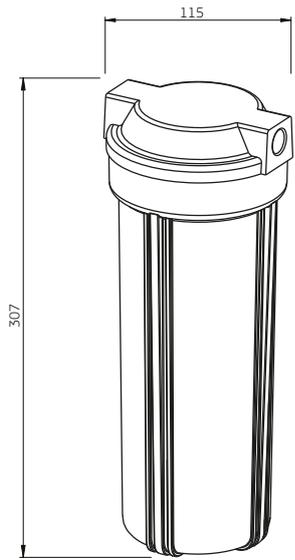

FP 10" HOUSINGS

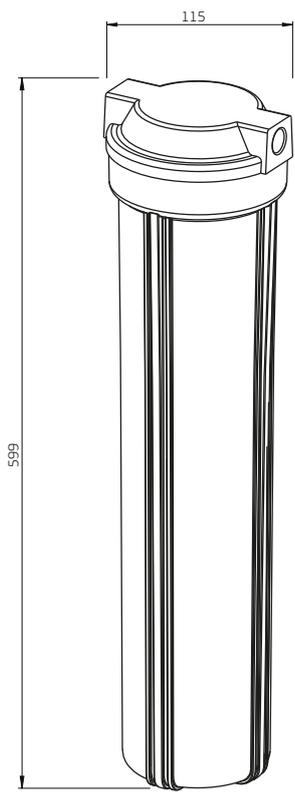

FP 20" HOUSINGS



- Note:**
1. No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change.
 2. This document and all its contents are copyright protected. All rights are reserved, particularly alteration, translation and reproduction using electronic systems.
 3. ^Warranties in this document cover parts for the period stated and include cover for parts and labour for the first year where applicable, subject to approval. Our Water Filtration Specialists can provide you with advice to suit your needs.